

REASSURANCE - Mobile MHW Series



Modular Cabinet Design Offers a Customizable Solution:

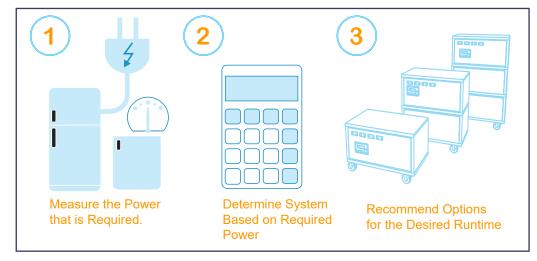


Applications:

- -80° Freezers
- · Vaccine Refrigerators
- Fume Hoods
- Sensitive Lab Equipmennt
- Operating Room Equipment
- Incubators
- Histology Equipment
- Imaging Equipment
- Mission Critical Medical Devices

Features:

- Internal Transfer Switch
- 4 Duplex Outlets
- Digital Control LCD Screen
- 2 Year Warranty
- 4 Year Prorated Battery Warrranty
- Space Saving Design
- No Ventilation Necessary
- No Exaust or Fumes
- Automatic Transfer (less than 1 sec)
- 10' 12 Gauge Power Cord

HOW OUR SYSTEMS WORK:

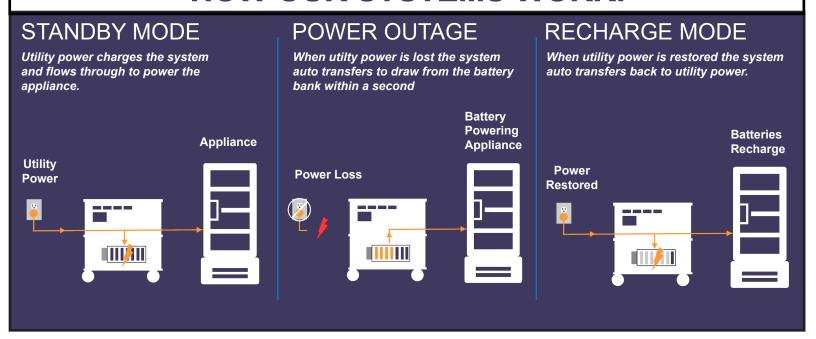

MOBILE SYSTEMS

REASSURANCE Mobile MHW Series

Model Numbers	Watts	Surge Watts	KWH	Waveform	Height (In)	Weight (lbs)	Cart Size	Volts/Amps	Output Breakers
MHW4020V	4000	8000	2.4	Pure	29.75	285	2 Tier	120/240V 30A	6
MHW4040V	4000	8000	4.8	Pure	29.75	435	2 Tier	120/240V 30A	6
MHW4060V	4000	8000	7.2	Pure	42.25	615	3 Tier	120/240V 30A	6
MHW4080V	4000	8000	9.6	Pure	42.25	765	3 Tier	120/240V 30A	6
MHW6020V	6000	12000	2.4	Pure	42.25	285	3 Tier	120/240V 30A	6
MHW6040V	6000	12000	4.8	Pure	42.25	435	3 Tier	120/240V 30A	6
MHW6060V	6000	12000	7.2	Pure	54.75	615	4 Tier	120/240V 30A	6
MHW6080V	6000	12000	9.6	Pure	54.75	765	4 Tier	120/240V 30A	6

OTHER OPTIONS:

Heat Output: Full Bulk Charge Mode: 1450 BTU per hr

Inverting @ Full Rated Wattage: 2250 BTU per hr

Inverting @ 0 Watts: 85 BTU per hr

Notes: All output breakers are single 20 amp. Units Can configured with

dual breakers as specified per order.



Power Outage Alert:

The optional power outage alert system calls you when a power outage occurs. This feature offers you peace of mind and better control when dealing with power failures.



Battery Monitor Kit:

The optional battery monitor kit enables you to remotely monitor the battery during a power outage via the internet, by offering an estimated runtime based upon the rate of discharge.

UNIT DIMENSIONS

