
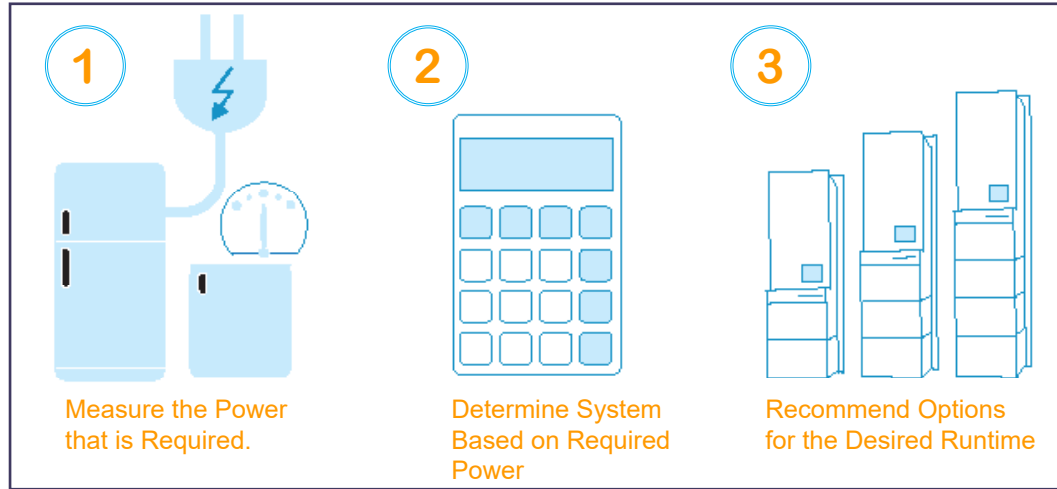


# SILENT SENTRY SSH & SHCS - 8000, 8800 13.2KW & 17.6 KW Systems

## Modular Cabinet Design Offers a Customizable Solution:

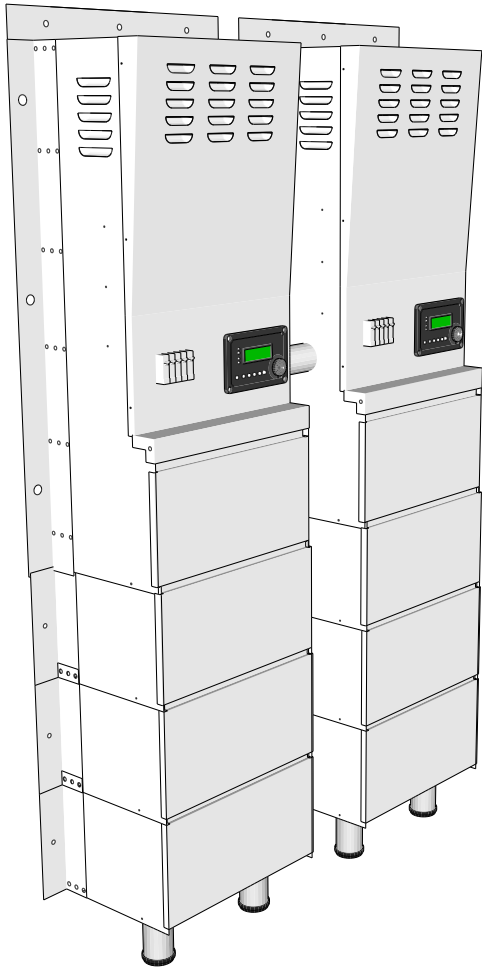


### Applications:

- - 80° Freezers
- Vaccine Refrigerators
- Fume Hoods
- Sensitive Lab Equipment
- Operating Room Equipment
- Incubators
- Histology Equipment
- Imaging Equipment
- Mission Critical Medical Devices

### Features:

- Internal Transfer Switch
- 2 Duplex Outlets
- Digital Control LCD Screen
- 2 Year Warranty
- 4 Year Prorated Battery Warrantanty
- Space Saving Design
- No Ventilation Necessary
- No Exhaust or Fumes
- Auto Transfers in less than 1 Sec.

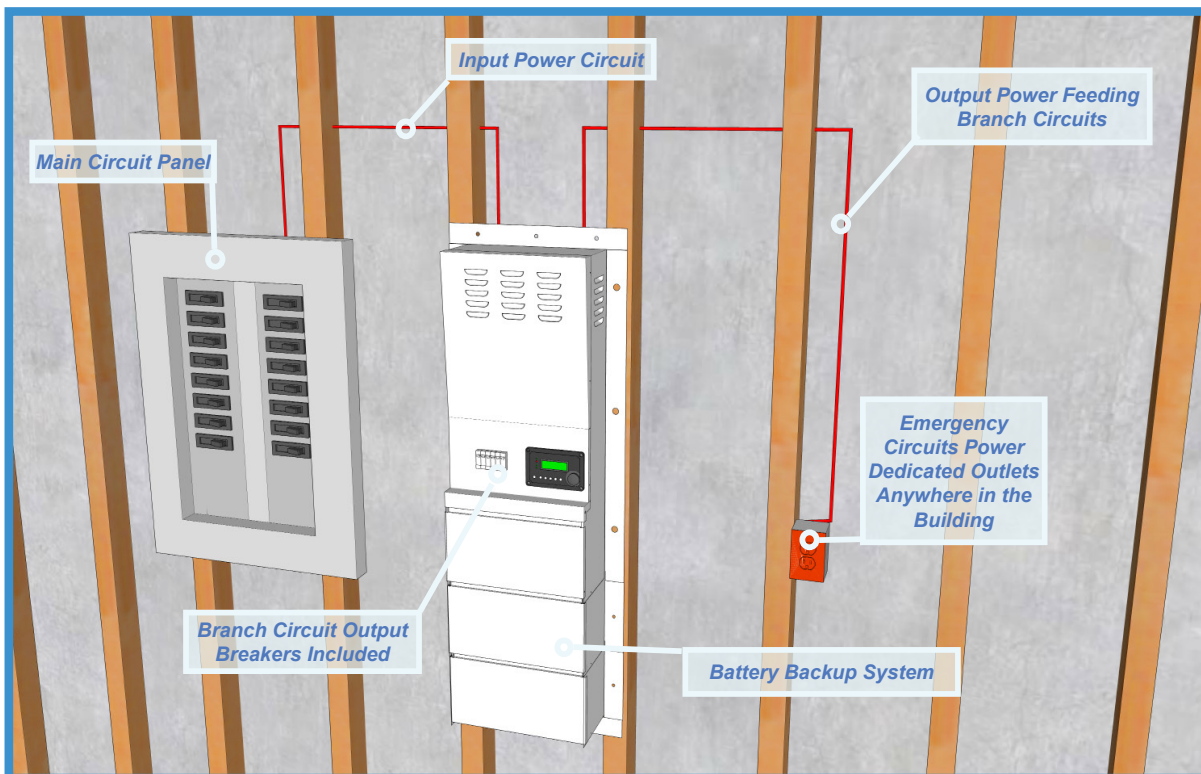

### OPTIONS:



#### **Power Outage Alert:**

The optional power outage alert system calls you when a power outage occurs. This feature offers you peace of mind and better control when dealing with power failures.



#### **Battery Monitor Kit:**

The optional battery monitor kit enables you to remotely monitor the battery during a power outage via the internet, by offering an estimated runtime based upon the rate of discharge.

**SILENT SENTRY SSH & SHCS - 8000, 8800 13.2KW & 17.6 KW Systems**

Model Numbers	Watts	Surge Watts	KWH	Waveform	Height (In)	Weight (lbs)	Width (In)	Cabinets
SSH8040MS SHCS8040MS	8000	16000	4.8	Pure	43.00	525	40.00	2
SSH80120MS SHCS80120MS	8000	16000	14.4	Pure	77.75	1260	40.00	2
SSH8880MS SHCS8880MS	8800	17600	9.6	Pure	62.25	865	40.00	2
SSH88160MS SHCS88160MS	8800	17600	19.2	Pure	93.25	1600	40.00	2
SSH13.2120MS	13200	26200	14.4	Pure	62.25	1890	58.00	3
SSH13.2240MS	13200	26200	28.8	Pure	93.25	2320	58.00	3
SSH17.6160MS	17600	35200	19.2	Pure	62.25	1840	74.00	4
SSH17.6320MS	17600	35200	38.4	Pure	93.25	3120	74.00	4

All Above Systems being supplied with 208 volts, will require an Isolation Transformer installed on the line side the system.

**Note:**


SSH and SHCS models are the same configuration. SHCS models support cold storage appliances, SSH models are for all other mission critical applications.

**Heat Output:**

Full Bulk Charge Mode: 1450 BTU per hr  
 Inverting @ Full Rated Wattage: 2250 BTU per hr  
 Inverting @ 0 Watts: 85 BTU per hr

**UNIT DIMENSIONS**

System Wattage	Voltage	Input Circuit	Output Breakers
8000	120 or 240	60/30 Amp	6 (20 Amp Single) or Specified
8800	120 or 240	60/30 Amp	6 (20 Amp Single) or Specified
13200	240	60 Amp	12 (20 Amp Single) or Specified
17600	240	90 Amp	12 (20 Amp Single) or Specified

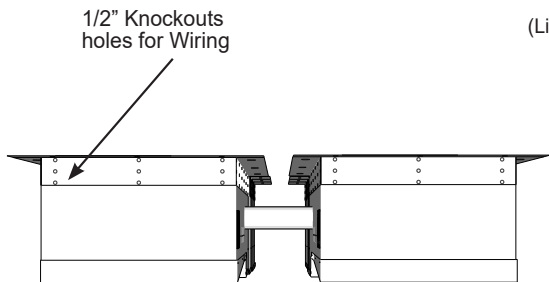

TOP

