

# **MHW6060V**

### Free-Standing Hardwire - Battery Backup Power System



# **HOW OUR SYSTEMS WORK:**


## STANDBY MODE

Utility power charges the system and flows through to power the appliance.



# POWER OUTAGE

When utilty power is lost the system auto transfers to draw from the battery bank within a second

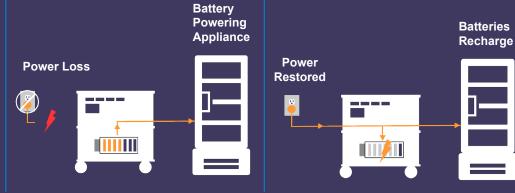

### **RECHARGE MODE** When utility power is restored the system

auto transfers back to utility power.

# **MHW6060V**

#### Free-Standing Hardwire - Battery Backup Power System

ELECTRICAL INFORMATION:						
Model Numbers	Wattage	Line Power	Load Power	Conductors	Battery Type	
MHW6060V	6000	120/240 Volts 30 Amps	120/240 Volts 30 Amps	1 Hot 1 Neutral 1 Ground	AGM	

		SYSTE	EM SIZE			
Model Numbers	Waveform	Width (A)	Depth (B)	Height (C)	Weight (lbs)	Cabinets
MHW6060V	Pure	36.25"	16.50"	63.00"	1095	1

Heat Output:	Full Bulk Charge Mode: 8700 BTU per hr Inverting @ Full Rated Wattage: 13,500 BTU per hr Inverting @ 0 Watts: 510 BTU per hr
Note:	Unit Onsite Special Certification Inspection - per customer request.
Warranty:	2 year System Warranty - 4 year Battery Warranty

#### **UNIT DIMENSIONS**

